

CREATE NEW ERA FOLDABLE POS

*A Industrial Grade
Exquisite Work of Art*




Foldable multi-position dual hinge stand for unparalleled flexibility

Flexible angle & height adjustment, adapt to various store layouts



Smaller packaging volume, lower shipping cost

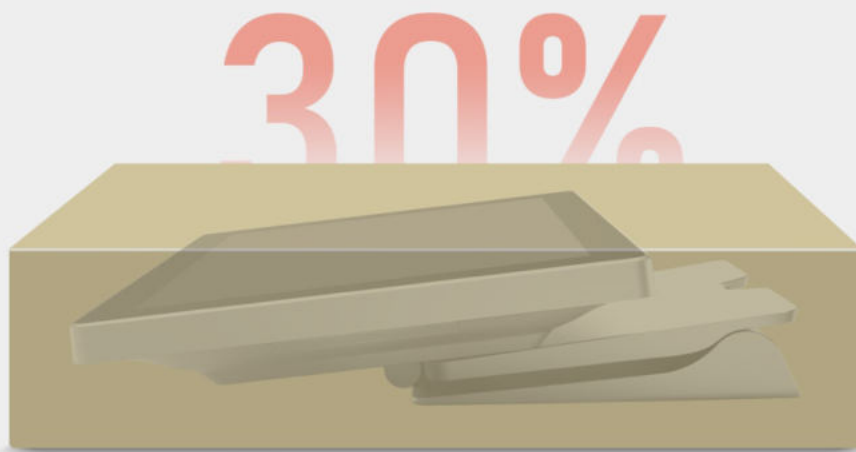

Foldable base reduces packaging volume by 30%

Fanless design with strong cooling system for more excellent performance

- 30% increase in performance
- Vent-less design for dust-proof & splash proof
- Quiet-running




Oil-proof



Fanless



Dust-proof

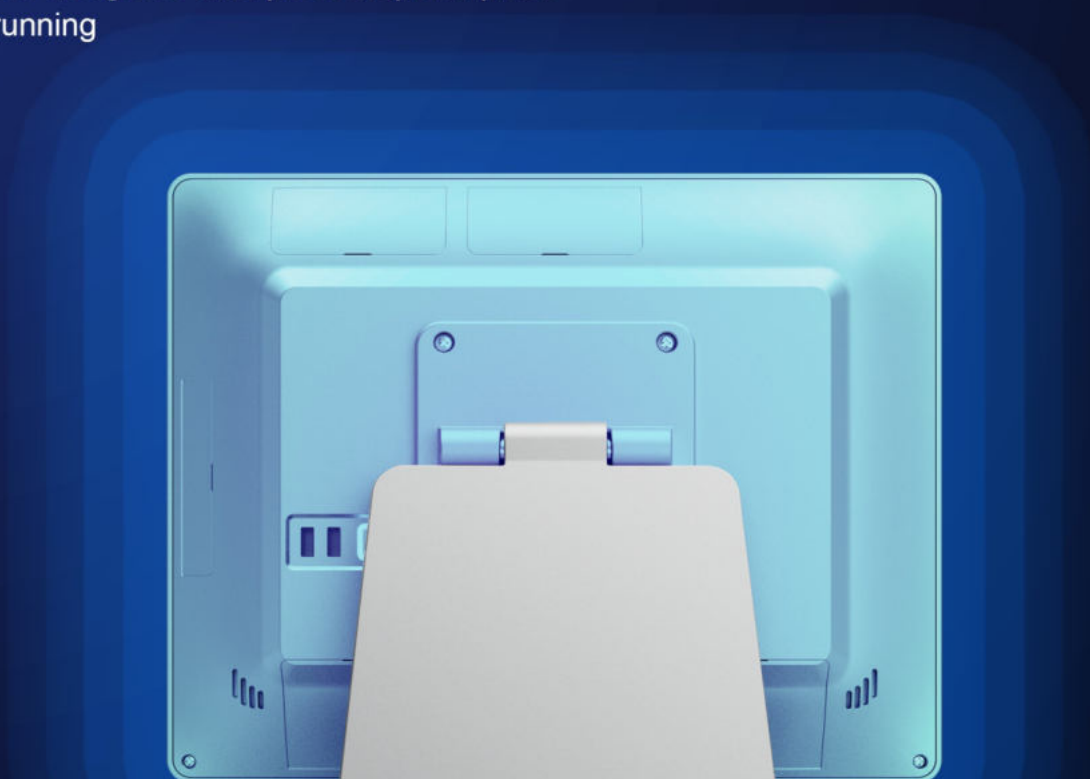

Modular design makes collocation more free



2nd displays




VFD2*20



MSR/ RFID/ NFC/ iButton

**User-friendly hidden cable management,
tidy & organized station**

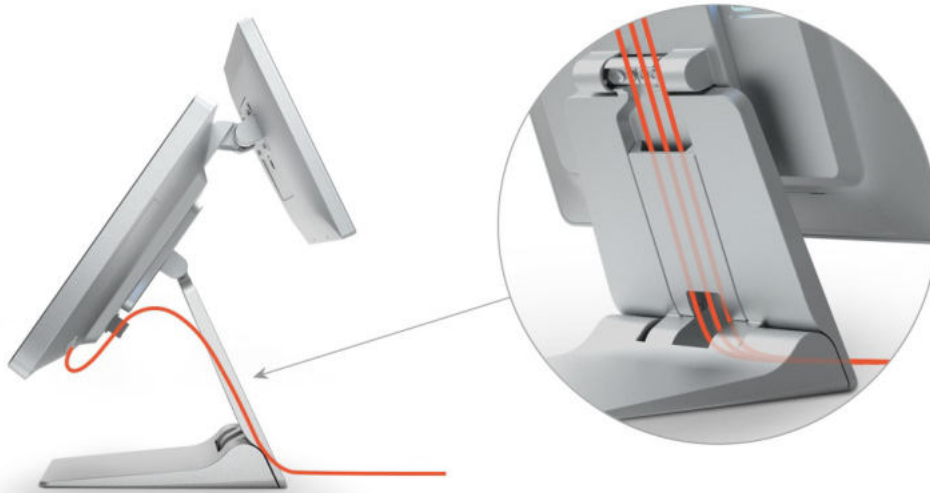

**Removable 2.5"SSD
for fast swap**



**Ruggedized full aluminum
alloy body**

Die-cast aluminum material,
extremely robust and durable



Standard Color: Black



Premium Color: Silver

CRANE I

Specification

Main Board	Processor	Intel® Celeron® J6412 (1.5M Cache, up to 2.60GHz)	11th generation Core i3 (6M Cache, up to 3.0GHz)
	OS Support	Windows 10/11/Linux	
	Default OS	Windows 10 IoT Enterprise	
	Memory	DDR4 4GB/8GB/16GB (Default: DDR4 4GB)	
	SSD	1x2.5" SATA SSD 64G/128G/256G (Default: 128GB)	
Display & Touch	LCD Size	15" TFT LCD (LED backlight)	
	Resolution	1024(RGB)x768	
	Touch Technology	True Flat Projected Capacitive Technology	
I/O & Expansion	Main board type	Mini-ITX	
	DC Input	1	1
	HDMI	1	1
	USB port	2xUSB 3.0 4 x USB 2.0 (2 on the shell)	2 x USB 3.0 4 x USB 2.0 (2 on the shell)
	COM port	4(1 internal for rear display)	
	VGA port	/	
	AUDIO in/out	1(out)	1/1
	Power Switch	1	1
	LAN	1	1
	RJ11	1	/
	RJ50	1	/
Wall Mount	Main screen	VESA 100x 100mm	
	Stand	VESA 100x100mm	
Material	Main unit: die-cast aluminum		I/O Cover: ABS plastic
Optional Accessories	Rear displays	2 x 20 VFD Display	
		9.7" LCD panel	
	3 track MSR	Available	
	RFID/NFC	Available	
	IButton	Available	
	Fingerprint	Available	
	Internal speaker	Available	
	Internal WLAN modular	Available	
Windows Licenses	Available		
Compliance	Certifications	CE, Rohs, FCC, UKCA	
	Protection	Ip65 on front panel	
Environment	Operating Temperature	0°C~50°C	0°C~45°C
	Storage Temperature	-20°C~60°C	-20°C~60°C

LONGSHINE Technologie GmbH

www.longshine.de

info@longshine.de

An der Strusbek 9, D-22926, Ahrensburg, Germany

No 945, Boai St, Jubei City. Hsinchu, 30265 Taiwan

Tel.: +49 4102 49220 Fax: +49 4102 40109

